

**PRODUCT
CATALOG**

When It's **Light**, It's High **light**!

2025-2026

HL 1002 RD



	in MM	in MM
POWER	DIMENSION	CUTOUT
4W	Ø70x35(H)	Ø58
7W	Ø88x42(H)	Ø70

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1003



	in MM	in MM
POWER	DIMENSION	CUTOUT
12W	Ø115x60(H)	Ø95
15W	Ø115x60(H)	Ø95
20W	Ø125x75(H)	Ø105
30W	Ø145x90(H)	Ø130
40W	Ø160x100(H)	Ø145
50W	Ø160x100(H)	Ø145

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1004



	in MM	in MM
POWER	DIMENSION	CUTOUT
7W	Ø70x58(H)	Ø60
12W	Ø85x80(H)	Ø75
15W	Ø85x80(H)	Ø75
20W	Ø98x90(H)	Ø86

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1005



	in MM	in MM
POWER	DIMENSION	CUTOUT
9W	Ø70x65(H)	Ø60
12W	Ø85x75(H)	Ø75
15W	Ø85x75(H)	Ø75
20W	Ø94x95(H)	Ø86

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1010



	in MM	in MM
POWER	DIMENSION	CUTOUT
15W	Ø83x83x83(H)	Ø77x77

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1010



	in MM	in MM
POWER	DIMENSION	CUTOUT
2x15W	Ø162x83x83(H)	Ø155x77

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K/CCT
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1015



POWER	in MM DIMENSION	in MM CUTOUT
9W	Ø91x84(H)	Ø82

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1023



POWER	in MM DIMENSION	in MM CUTOUT
9W	Ø70x55(H)	Ø60
12W	Ø85x66(H)	Ø75
15W	Ø85x66(H)	Ø75
18W	Ø95x77(H)	Ø85

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH, BK, WH/BK+COP
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1025



	in MM	in MM
POWER	DIMENSION	CUTOUT
8W	Ø75x55(H)	Ø65
12W	Ø88x65(H)	Ø75
18W	Ø95x75(H)	Ø88

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1030



	in MM	in MM
POWER	DIMENSION	CUTOUT
7W	Ø82x100(H)	Ø72

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH+BK, BK+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1031



	in MM	in MM
POWER	DIMENSION	CUTOUT
15W	Ø100x117(H)	Ø90
BEAM ANGLE	: 0°	
LED COLOR	: 3K/4K/5K/6K	
BODY COLOR	: WH+BK, BK+BK	
IP RATING	: IP20	
CRI	: >90	
DRIVER	: ABC	
INPUT VOLTAGE	: 230-240 VAC	
MATERIAL	: ALUMINIUM	
REFLECTOR	: ALU. ANODIZED	



HL 1032



	in MM	in MM
POWER	DIMENSION	CUTOUT
6W	Ø40x56(H)	Ø33
9W	Ø60x82(H)	Ø52
12W	Ø60x100(H)	Ø52
18W	Ø75x95(H)	Ø67

BEAM ANGLE	: 0°	
LED COLOR	: 3K/4K/5K/6K	
BODY COLOR	: WH, BK, COP	
IP RATING	: IP20	
CRI	: >90	
DRIVER	: ABC	
INPUT VOLTAGE	: 230-240 VAC	
MATERIAL	: ALUMINIUM	
REFLECTOR	: ALU. ANODIZED	



HL 1038



	in MM	in MM
POWER	DIMENSION	CUTOUT
9W	Ø85x90(H)	Ø75
12W	Ø85x90(H)	Ø75
15W	Ø85x90(H)	Ø75

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH+BK, WH+WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1039



	in MM	in MM
POWER	DIMENSION	CUTOUT
12W	Ø55x20(H)	Ø44

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1042



POWER 5W
DIMENSION in MM
Ø61x21(H)

BEAM ANGLE : 0°
LED COLOR : 3K/4K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >90
DRIVER : ABC
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 1046



POWER 12W
DIMENSION in MM
Ø81x111(H)
18W
Ø80x150(H)

BEAM ANGLE : 0°
LED COLOR : 3K/4K/5K/6K / CCT
BODY COLOR : BK+BM, BK+COP
IP RATING : IP20
CRI : >90
DRIVER : ABC
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 1047



	in MM
POWER	DIMENSION
12W	Ø80x111(H)
18W	Ø100x131(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1048



	in MM
POWER	DIMENSION
7W	Ø57x70(H)
12W	Ø70x90(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK, COP
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1049



	in MM
POWER	DIMENSION
8W	Ø55x80(H)
12W	Ø75x115(H)
18W	Ø75x130(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK, COP, GD, CHR
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1048



	in MM
POWER	DIMENSION
7W	Ø57x70(H)
12W	Ø70x90(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK, COP
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1050



POWER
9W

DIMENSION
in MM
Ø70x100(H)

BEAM ANGLE : 0°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >90
DRIVER : ABC
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 1052



POWER
10W
15W

DIMENSION
in MM
Ø50x135(H)
Ø65x160(H)

BEAM ANGLE : 0°
LED COLOR : 3K/4K/5K/6K
BODY COLOR : WH, BK
IP RATING : IP20
CRI : >90
DRIVER : ABC
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 1072



CREE 

bridgelux.
Bridging Light and Life™

	in MM	in MM
POWER	DIMENSION	CUTOUT
12W	Ø117x35(H)	Ø100
18W	Ø170x35(H)	Ø150
24W	Ø220x35(H)	Ø200

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1073



CREE 

bridgelux.
Bridging Light and Life™

	in MM	in MM
POWER	DIMENSION	CUTOUT
12W	Ø117x117x35(H)	Ø100x100
18W	Ø170x170x35(H)	Ø150x150
24W	Ø220x220x35(H)	Ø200x200

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1074



CREE 

bridgelux
Bridging Light and Life™

	in MM	in MM
POWER	DIMENSION	CUTOUT
12W	Ø120x50(H)	Ø110
18W	Ø148x50(H)	Ø142
24W	Ø170x50(H)	Ø164

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1075



CREE 

bridgelux
Bridging Light and Life™

	in MM	in MM
POWER	DIMENSION	CUTOUT
12W	Ø110x110x50(H)	Ø100x100
18W	Ø142x142x50(H)	Ø134x134

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1076



POWER	in MM	in MM
	DIMENSION	CUTOUT
12W	Ø91x54(H)	Ø83
18W	Ø100x57(H)	Ø92

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1078



POWER	in MM
	DIMENSION
8W	Ø91x28(H)
15W	Ø145x28(H)
22W	Ø170x28(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1079



POWER	in MM
	DIMENSION
8W	Ø91x91x28(H)
15W	Ø145x145x28(H)
22W	Ø170x170x28(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1080



CREE 

bridgelux
Bridging Light and Life™

POWER	in MM
	DIMENSION
12W	Ø117x36(H)
18W	Ø170x36(H)
24W	Ø220x30(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1081



CREE 

bridgelux
Bridging Light and Life™

POWER	in MM
	DIMENSION
12W	Ø117x117x36(H)
18W	Ø170x170x36(H)
24W	Ø220x220x36(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 1082



POWER

12W

20W

30W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux.
Bridging Light and Life™

HL 1083



POWER

12W

18W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K / CCT
BODY COLOR	: WH+BK, BK+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux.
Bridging Light and Life™

HL 1084



POWER

15W

20W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH+BK, WH+COP
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life®

HL 1085



POWER

9W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life®

HL 1086



POWER

15W

30W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1088



POWER

20W

25W

35W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1089



POWER

15W

20W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1089



POWER

25W

30W

40W

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K/5K/6K
BODY COLOR	: WH, BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1090



LENGTH

1 MTR

2 MTR



TRACK PATTI

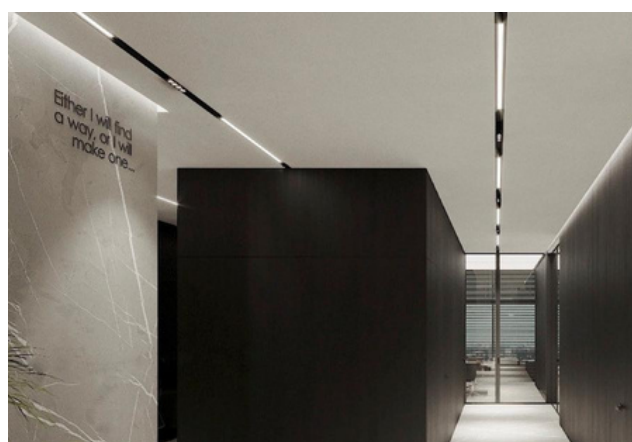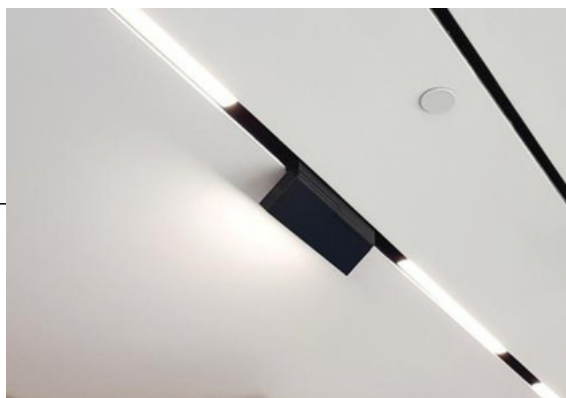

High Light TM

L U M I N A I R E S

HL 1101



	in MM	in MM
POWER	DIMENSION	CUTOUT
10W	Ø108x32x40(H)	Ø102x26

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1101



	in MM	in MM
POWER	DIMENSION	CUTOUT
20W	Ø204x32x40(H)	Ø198x26

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1101



	in MM	in MM
POWER	DIMENSION	CUTOUT
8W	Ø52x52x40(H)	Ø45x45

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1101



	in MM	in MM
POWER	DIMENSION	CUTOUT
16W	Ø71x71x40(H)	Ø65x65

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1102



	in MM	in MM
POWER	DIMENSION	CUTOUT
5x2W	Ø149x45x43(H)	Ø136x33

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1102




	in MM	in MM
POWER	DIMENSION	CUTOUT
10x2W	Ø280x45x43(H)	Ø271x34


BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: WH+BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1111

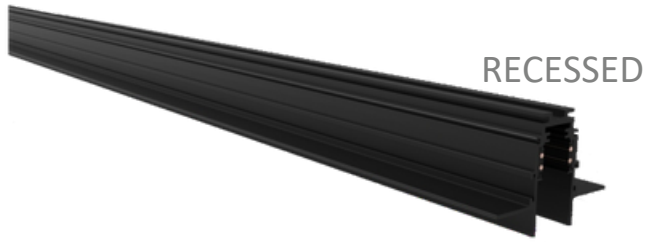

RECESSED

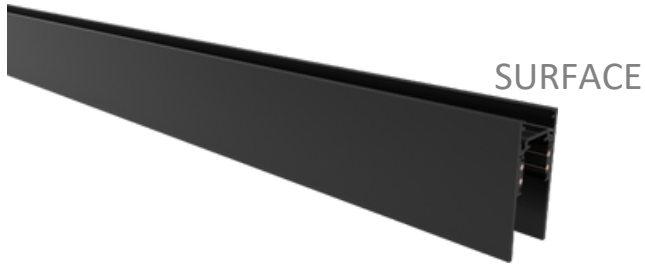


SURFACE

LENGTH	in MM
	DIMENSION
1 MTR	Ø1000
2 MTR	Ø2000
3 MTR	Ø3000

BODY COLOR : BK
MATERIAL : ALUMINIUM

:

HL 1112



RC CORNER-90°

DIMENSION
Ø100x100 in MM

BODY COLOR : BK
MATERIAL : ALUMINIUM



SF CORNER-90°

DIMENSION
Ø74x74 in MM

BODY COLOR : BK
MATERIAL : ALUMINIUM

HL 1113



DRIVER - INPUT MODULE

DIMENSION
Ø17x16x98 in MM

BODY COLOR : BK
MATERIAL : ALUMINIUM



DRIVER - CORNER MODULE

DIMENSION
Ø17x16x98 in MM

BODY COLOR : BK
MATERIAL : ALUMINIUM

HL 1114



POWER 6W
DIMENSION in MM
Ø112x22x110(H)

BEAM ANGLE : 0°
LED COLOR : 3K/4K / CCT
BODY COLOR : BK
IP RATING : IP20
CRI : >90
DRIVER : ABC
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 1114




POWER 12W
DIMENSION in MM
Ø220x22x110(H)

BEAM ANGLE : 0°
LED COLOR : 3K/4K / CCT
BODY COLOR : BK
IP RATING : IP20
CRI : >90
DRIVER : ABC
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 1115

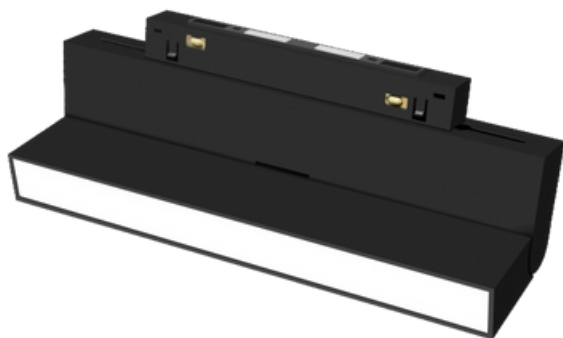

POWER	in MM
	DIMENSION
12W	Ø220x22x110(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1116



POWER	in MM
	DIMENSION
10W	Ø300x22x25(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K / CCT
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1116

in MM

POWER

20W

DIMENSION

Ø600x22x50(H)



BEAM ANGLE	: 0°
LED COLOR	: 3K/4K / CCT
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1117

in MM

POWER

6x1W

DIMENSION

Ø113x22x25(H)



BEAM ANGLE	: 0°
LED COLOR	: 3K/4K / CCT
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1117



POWER	in MM
	DIMENSION
12x1W	Ø220x22x50(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K / CCT
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1118



POWER	in MM
	DIMENSION
3W	Ø26x87(H)
6W	Ø36x100(H)
12W	Ø48x125(H)
20W	Ø58x175(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 1119



POWER	in MM
	DIMENSION
6W	Ø30x300(H)
12W	Ø60x300(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: BK
IP RATING	: IP20
CRI	: >90
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



LED STRIP LIGHT



12V DC

SPECIFICATION

2835-120 LED 5MM

2835-120 LED 8MM

2835-180 LED 10MM

2835-240 LED 10MM

24V DC

SPECIFICATION

2835-120 LED 5MM

2835-120 LED 8MM

2835-180 LED 10MM

2835-240 LED 10MM

LED DRIVER



12V DC SPECIFICATION

12V - 2 AMP - 24W

12V - 3 AMP - 36W

12V - 5 AMP - 60W

12V - 10 AMP - 120W

12V - 12.5 AMP - 150W

12V - 15 AMP - 180W

12V - 20 AMP - 240W

12V - 24 AMP - 288W



48V DC SPECIFICATION

48V - 100W

48V - 150W

48V - 200W



24V DC SPECIFICATION

24V - 2.5 AMP - 60W

24V - 4.25 AMP - 100W

24V - 6.25 AMP - 150W

24V - 8.3 AMP - 200W



20MM - 48V MAGNETIC DC SPECIFICATION

48V - 100W

48V - 150W

48V - 200W

HL 2110



CREE 

bridgelux
Bridging Light and Life™

in MM

POWER	DIMENSION
12W	Ø105x105x250(H)
12W	Ø105x105x500(H)
12W	Ø105x105x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2111



CREE 

bridgelux
Bridging Light and Life™

in MM

POWER	DIMENSION
12W	Ø130x250(H)
12W	Ø130x500(H)
12W	Ø130x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2112



	in MM
POWER	DIMENSION
12W	Ø180x250(H)
12W	Ø180x500(H)
12W	Ø180x1000(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2113



	in MM
POWER	DIMENSION
6W	Ø150x250(H)
6W	Ø150x500(H)
6W	Ø150x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2114



CREE 

bridgelux
Bringing Light and Life

	in MM
POWER	DIMENSION
12W	Ø250x250(H)
12W	Ø250x500(H)
12W	Ø250x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2115



CREE 

bridgelux
Bringing Light and Life

	in MM
POWER	DIMENSION
12W	Ø160x250(H)
12W	Ø160x500(H)
12W	Ø160x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2116



CREE 

bridgelux
Bridging Light and Life™

POWER **DIMENSION** in MM

12W	Ø105x250(H)
12W	Ø105x500(H)
12W	Ø105x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2117



CREE 

bridgelux
Bridging Light and Life™

POWER **DIMENSION** in MM

12W	Ø122x250(H)
12W	Ø122x500(H)
12W	Ø122x760(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2118



POWER

E27 HOLDER

E27 HOLDER

in MM

DIMENSION

Ø215x500(H)

Ø215x760(H)

BEAM ANGLE

: 0°

BODY COLOR

: DARK GREY

IP RATING

: IP54

CRI

: >95

CREE 

bridgelux.
Bridging Light and Life™

HL 2119



POWER

E27 HOLDER

E27 HOLDER

in MM

DIMENSION

Ø210x500(H)

Ø210x750(H)

BEAM ANGLE

: 0°

BODY COLOR

: DARK GREY

IP RATING

: IP54

CRI

: >95

CREE 

bridgelux.
Bridging Light and Life™

HL 2120



POWER

2xE27 HOLDER

2xE27 HOLDER

2xE27 HOLDER

in MM

DIMENSION

Ø275x380(H)

Ø275x685(H)

Ø275x990(H)

BEAM ANGLE

: 0°

BODY COLOR

: DARK GREY

IP RATING

: IP54

CRI

: >95

CREE 

bridgelux
Bridging Light and Life



HL 2126



POWER

12W

in MM

DIMENSION

Ø180x45(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2127



POWER

12W

in MM

DIMENSION

Ø180x250(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2128



POWER
E27 HOLDER

in MM
DIMENSION
Ø215x200(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95



HL 2129



POWER
E27 HOLDER

in MM
DIMENSION
Ø215x200(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95



HL 2130




POWER
E27 HOLDER

in MM
DIMENSION
Ø210x205(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95



HL 2131

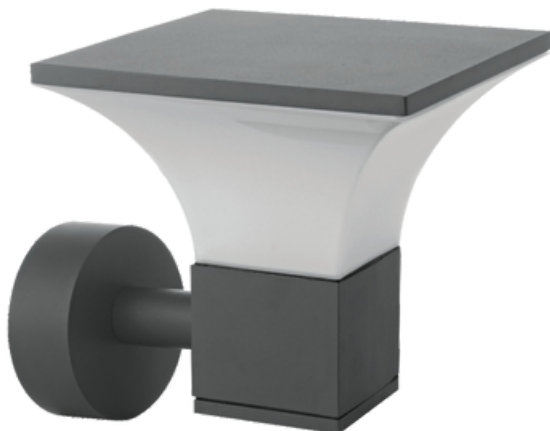

POWER
E27 HOLDER

in MM
DIMENSION
Ø210x205(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95



HL 2132



POWER	in MM
	DIMENSION
12W	Ø150x150x152(H)
15W	Ø254x254x254(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95



HL 2133



POWER	in MM
	DIMENSION
3W	Ø80x75(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2134



POWER

3W

in MM
DIMENSION
Ø81x143(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2135



POWER

1x5W

in MM
DIMENSION
Ø63x63x79(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2136



POWER
2x5W

in MM
DIMENSION
Ø63x63x135(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2137



POWER
1x5W

in MM
DIMENSION
Ø64x82(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2138



POWER
2x5W

in MM
DIMENSION
Ø64x158(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2139



POWER
1x12W

in MM
DIMENSION
Ø90x155(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2140



POWER
2x12W

in MM
DIMENSION
Ø90x255(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2141



POWER
50W

in MM
DIMENSION
Ø88x132x133(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2142



POWER
2x50W

in MM
DIMENSION
Ø130x180x245(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2143



POWER
2x3W

in MM
DIMENSION
Ø60x43x120(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2144



POWER
2x3W

in MM
DIMENSION
Ø40x60x120(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2145



POWER
2x6W
2x8W

in MM
DIMENSION
Ø115x90(H)
Ø175x28x90(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2146



POWER

4x1W

6x1W

in MM

DIMENSION

Ø60X43x120(H)

Ø60X43x120(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life™

HL 2147



POWER

4x3W

in MM

DIMENSION


Ø100x100(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life™

HL 2148

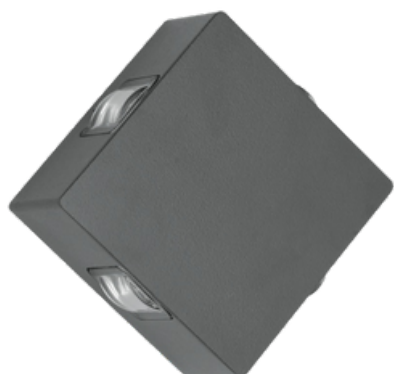

POWER

4x3W

in MM

DIMENSION

Ø100x100(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2149



POWER

6W

in MM

DIMENSION

Ø100x100(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2150



POWER
3x3W

in MM
DIMENSION
Ø200(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2151



POWER
2x3W

in MM
DIMENSION
Ø70x70x52(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2152



POWER

4x3W

in MM

DIMENSION

Ø70x70x52(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2153



POWER

4x3W

in MM

DIMENSION

Ø100x100(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2155



POWER

2x3W

4x3W

6x3W

in MM

DIMENSION

Ø80x78(H)

Ø115x78(H)

Ø170x78(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2156



POWER

5W

in MM

DIMENSION

Ø64x97x85(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

HL 2157



POWER
2x5W

in MM
DIMENSION
Ø64x97x100(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2158



POWER
9W

in MM
DIMENSION
Ø118x158(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2159



POWER
6W

in MM
DIMENSION
Ø153x96(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2160



POWER
4W
8W

in MM
DIMENSION
Ø93x71(H)
Ø150x70(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2161



POWER
9W

in MM
DIMENSION
Ø160x20(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2162



POWER
9W

in MM
DIMENSION
Ø160x160x25(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2163



POWER
6W

in MM
DIMENSION
Ø80x233(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2164



POWER
8W

in MM
DIMENSION
Ø80x233(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2165



POWER
10W

in MM
DIMENSION
Ø65x64x175(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : BK
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2166




POWER
10W

in MM
DIMENSION
Ø81x65x212(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2176

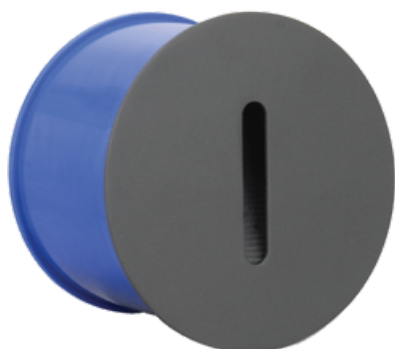


POWER
3W

in MM
DIMENSION
Ø96x60(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : GRAPHITE GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2177

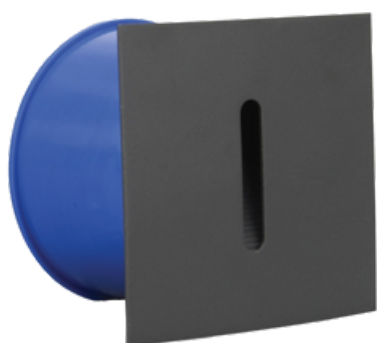

POWER
3W

in MM
DIMENSION
Ø96x96x60(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : GRAPHITE GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2178



POWER

3W

in MM

DIMENSION

Ø84x84x45(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: GRAPHITE GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2179



POWER

6W

in MM

DIMENSION

Ø135x80x75(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: GRAPHITE GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2180



POWER
3W

in MM
DIMENSION
Ø48x63(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : WH
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2181



POWER
3W

in MM
DIMENSION
Ø46x46x80(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2182



POWER
3W

in MM
DIMENSION
Ø60x65(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2183



POWER
3W

in MM
DIMENSION
Ø50x80(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2184



POWER

3W

in MM

DIMENSION

Ø198x47x198(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life™



High Light TM
L U M I N A I R E S

LED POLE LIGHT



HL 2189

POWER : 50W | 100W
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
DIMENSION : Ø3000(H)MM
MATERIAL : ALUMINIUM



HL 2190

POWER : 30W
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
DIMENSION : Ø3000(H)MM
MATERIAL : ALUMINIUM



HL 2191

POWER : 50W | 100W
LED COLOR : 3K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
DIMENSION : Ø3000(H)MM
MATERIAL : ALUMINIUM

LED POLE LIGHT



HL 2192

POWER : 30 | 45 | 75 | 100 | 150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : AS PER REQUEST
(75MM/100MM)



HL 2193

POWER : 30 | 45 | 75 | 100 | 150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : 100x100MM

LED POLE LIGHT



HL 2194

POWER : 30|45|75|100|150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : AS PER REQUEST
(75MM/100MM)



HL 2195

POWER : 30|45|75|100|150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : AS PER REQUEST
(75MM/100MM)



HL 2196

POWER : 30|45|75|100|150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : AS PER REQUEST
(75MM/100MM)

LED POLE LIGHT



HL 2197

POWER : 30 | 45 | 75 | 100 | 150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : 100x100MM



HL 2198

POWER : 30 | 45 | 75 | 100 | 150W
LED COLOR : 3K/4K
BODY COLOR : DARK GREY
IP RATING : IP54
CRI : >95
LENGTH : CUSTOMIZED
PIPE DIA : 75x75MM

HL 2210



POWER	DIMENSION
	in MM
7W	Ø64x91x186(H)
12W	Ø85x95x186(H)
BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2211



POWER	DIMENSION
	in MM
7W	Ø64x110x186(H)
12W	Ø85x110x186(H)
BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2212



POWER

7W

12W

in MM

DIMENSION

Ø64x110(H)

Ø85x110(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life®

HL 2213



POWER

7W

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life®

HL 2214



POWER

3W

7W

12W

Max 20W

in MM

DIMENSION

Ø45x66(H)

Ø66x100(H)

Ø66x100(H)

Ø66x130(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life



High Light TM
L U M I N A I R E S


HL 2216



POWER
15W

in MM
DIMENSION
Ø68x101(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: GREY
IP RATING	: IP65
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

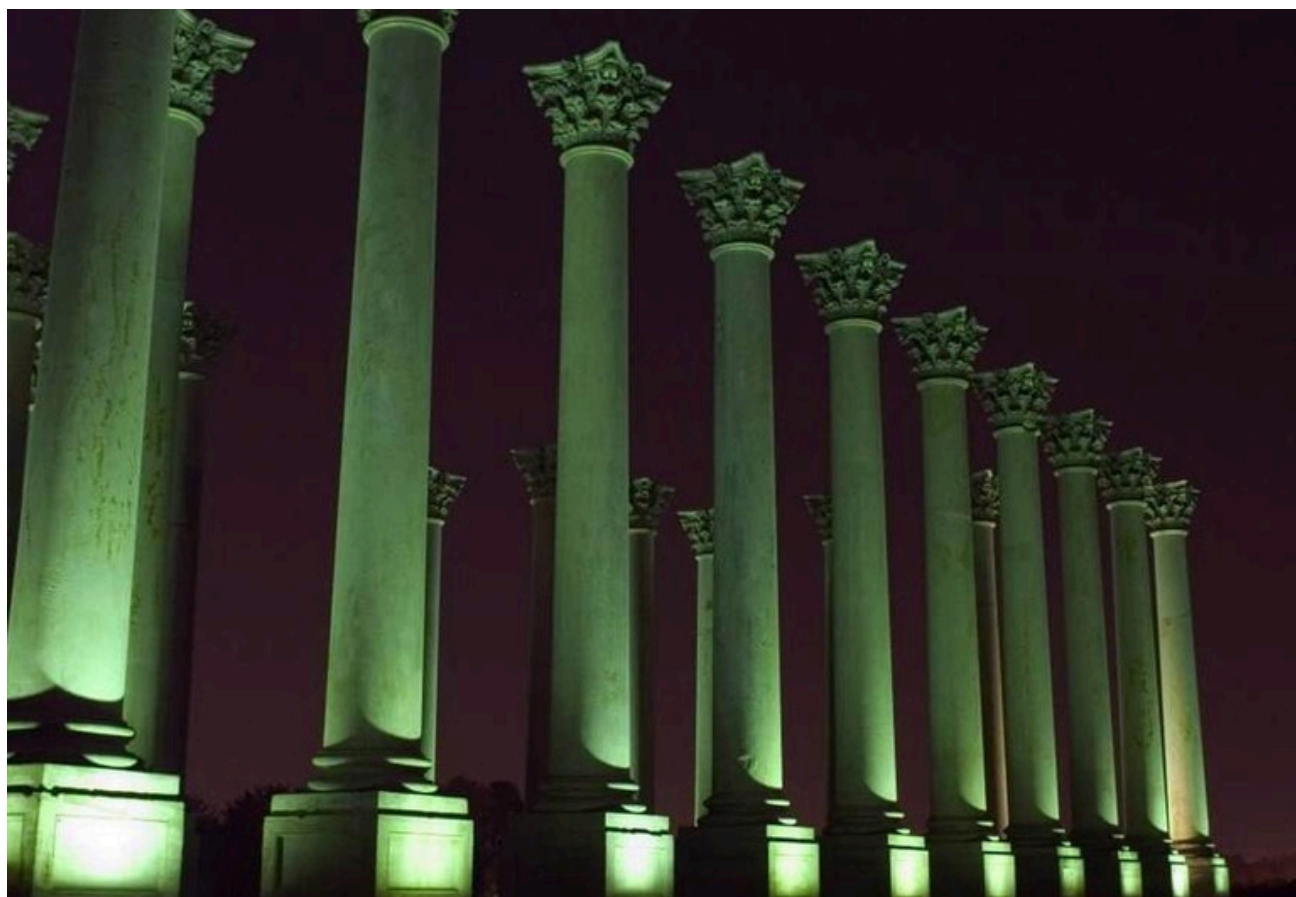

HL 2220



POWER
3W

DIMENSION
in MM
Ø58x14(H)

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : BK
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2221



POWER
GU 10

BEAM ANGLE : 0°
LED COLOR : 3K
BODY COLOR : GREY
IP RATING : IP54
CRI : >95
INPUT VOLTAGE : 230-240 VAC
MATERIAL : ALUMINIUM
REFLECTOR : ALU. ANODIZED



HL 2222



POWER

1x5W

in MM

DIMENSION

Ø63x79(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life®

HL 2223



POWER

5W

in MM

DIMENSION

Ø64x82(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bridging Light and Life®

HL 2224



POWER

50W

in MM

DIMENSION

Ø130x250(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K/4K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux.
Bridging Light and Life™

HL 2225



POWER

12W

in MM

DIMENSION

Ø90x130(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux.
Bridging Light and Life™

HL 2229



	in MM	in MM
POWER	DIMENSION	CUTOUT
1x2W	Ø84x90(H)	Ø68
2x1W	Ø84x90(H)	Ø68
4x1W	Ø84x90(H)	Ø68

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: DARK GREY
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2230



	in MM	in MM
POWER	DIMENSION	CUTOUT
3W	Ø43x70(H)	Ø34

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: SS FINISH
IP RATING	: IP65
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2231



	in MM
POWER	DIMENSION
7W	Ø85x90(H)
12W	Ø110x110(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: SS FINISH
IP RATING	: IP54
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2232



	in MM	in MM
POWER	DIMENSION	CUTOUT
6W	Ø83x65(H)	Ø73
12W	Ø114x63(H)	Ø100

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: SS FINISH
IP RATING	: IP65
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2238



	in MM	in MM
POWER	DIMENSION	CUTOUT
3W	Ø100x23(H)	Ø75
6W	Ø100x23(H)	Ø75
9W	Ø140x23(H)	Ø110
12W	Ø140x23(H)	Ø110

BEAM ANGLE	: 0°
LED COLOR	: WW, GR, BL
BODY COLOR	: SS FINISH
IP RATING	: IP68
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2239



	in MM
POWER	DIMENSION
3W	Ø75x23(H)
6W	Ø75x23(H)
9W	Ø110x23(H)
12W	Ø110x23(H)

BEAM ANGLE	: 0°
LED COLOR	: WW, GR, BL
BODY COLOR	: SS FINISH
IP RATING	: IP68
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2240



POWER

3W

6W

9W

12W

in MM

DIMENSION

Ø75x23(H)

Ø75x23(H)

Ø110x154(H)

Ø110x154(H)

BEAM ANGLE	: 0°
LED COLOR	: WW, GR, BL
BODY COLOR	: SS FINISH
IP RATING	: IP68
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE 

bridgelux
Bringing Light and Life



HL 2245



POWER	DIMENSION in MM	CUTOUT in MM
10W	Ø350x55x65(H)	Ø310x45x70
20W		
30W		
40W		
BEAM ANGLE	: 0°	
LED COLOR	: 3K/4K	
BODY COLOR	: SS FINISH	
IP RATING	: IP65	
CRI	: >95	
INPUT VOLTAGE	: 230-240 VAC	
MATERIAL	: ALUMINIUM	
REFLECTOR	: ALU. ANODIZED	

CREE ⇄

bridgelux.
Bridging Light and Life™

HL 2247



POWER	DIMENSION in MM
11W	Ø300x43x48(H)
22W	Ø600x43x48(H)
44W	Ø1200x43x48(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: GREY
IP RATING	: IP65
CRI	: >95
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED

CREE ⇄

bridgelux.
Bridging Light and Life™

HL 2250



in MM			
POWER	DIMENSION	BEAM ANGLE	: 0°
30W	Ø180x60x200(H)	LED COLOR	: 3K/6K RD/BL/GR
50W	Ø205x60x215(H)	BODY COLOR	: DARK GREY
100W	Ø245x70x270(H)	IP RATING	: IP67
150W	Ø285x70x305(H)	CRI	: >95
200W	Ø325x80x345(H)	INPUT VOLTAGE	: 230-240 VAC
300W	Ø370x80x415(H)	MATERIAL	: ALUMINIUM
400W	Ø500x70x465(H)	REFLECTOR	: ALU. ANODIZED

HL 2251



POWER

50W

in MM

DIMENSION

Ø230x60(H)

BEAM ANGLE	: 0°
LED COLOR	: 3K
BODY COLOR	: BK
IP RATING	: IP65
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



HL 2252



POWER

100W

in MM

DIMENSION

Ø290

150W

Ø350

200W

Ø350

BEAM ANGLE	: 0°
LED COLOR	: 65K
BODY COLOR	: BK
IP RATING	: IP65
CRI	: >95
DRIVER	: ABC
INPUT VOLTAGE	: 230-240 VAC
MATERIAL	: ALUMINIUM
REFLECTOR	: ALU. ANODIZED



LED STREET LIGHT



24W

36W

50W

72W

100W

150W

HL 2255

LED COLOR : 3K/6K | IP RATING : IP65 | BODY COLOR : DARK GREY

Your Furniture Journey Begins Here

Thank you for exploring our collection. Each piece is crafted with passion and precision.

www.highlightluminaires.com



BanjaraHills, Hyderabad.



+91 90006 39900
+91 90004 23888